
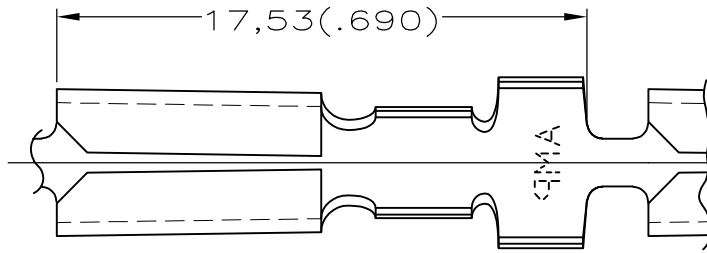




LOC —	DIST —	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
			D2	REVISED PER ECO-15-005127	11MAY2015	NG	PS

WIRE RANGE :
0,8–2,0mm² (18–14 AWG)


INSULATION RANGE :
3,30–4,45 DIA. (.130–.175)



VIEW A-A

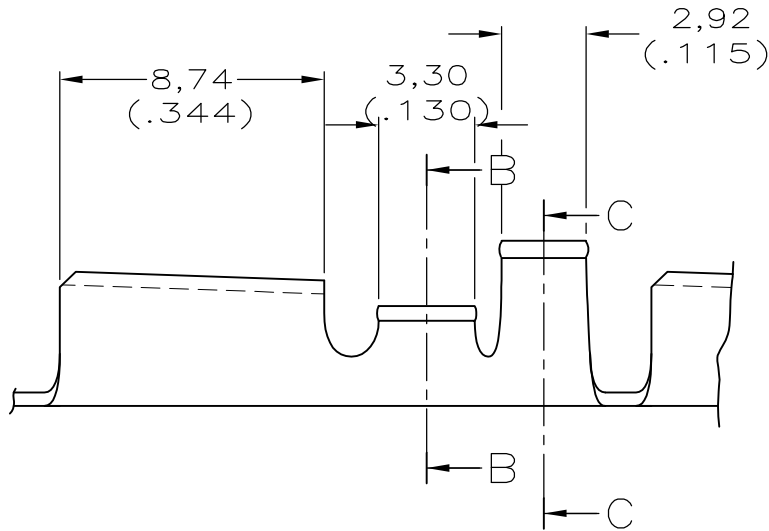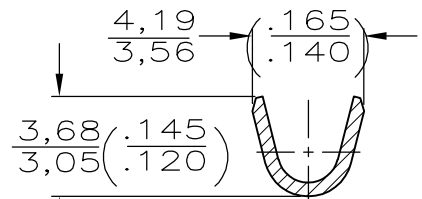

SECTION B-B

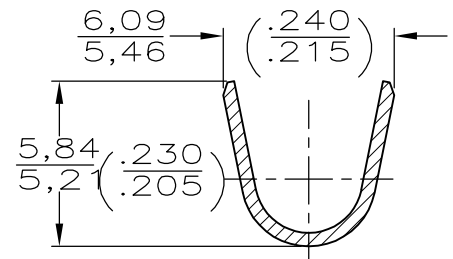

SECTION C-C

NOTES:

- 1 CONTINUOUS STRIP, ON REELS.
- 2 DIM'S IN BRACKETS ARE IN INCHES.

△ SPLICE-FREE.

OBSOLETE	TIN PLATED	0,46 (.018) THK. BRASS	-62734-4
OBSOLETE	SILVERPLATED	0,46 (.018) THK. BRASS	△ -62734-3
	SILVERPLATED	0,46 (.018) THK. BRASS	62734-2
	FINISH	MATERIAL	PARTNUMBER

DIMENSIONS: mm	DWN R.DAAMEN	02-09-92	MATERIAL —	FINISH —
	CHK R.DIJKSTRA	—		
TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD L.v.SOEST	—		
0 PLC ± —	PRODUCT SPEC	—	NAME .156 DIA. PIN RECEPTACLE	
1 PLC ± —	—	—		
2 PLC ± —	APPLICATION SPEC	—	SIZE	CAGE CODE
3 PLC ± —	—	—	A4	00779
4 PLC ± —	WEIGHT	—	DRAWING NO	RESTRICTED TO
ANGLES ± —	—	—	C-62734	—
		CUSTOMER DRAWING		
		SCALE	1:1	SHEET 1 OF 1
		REV D2		