


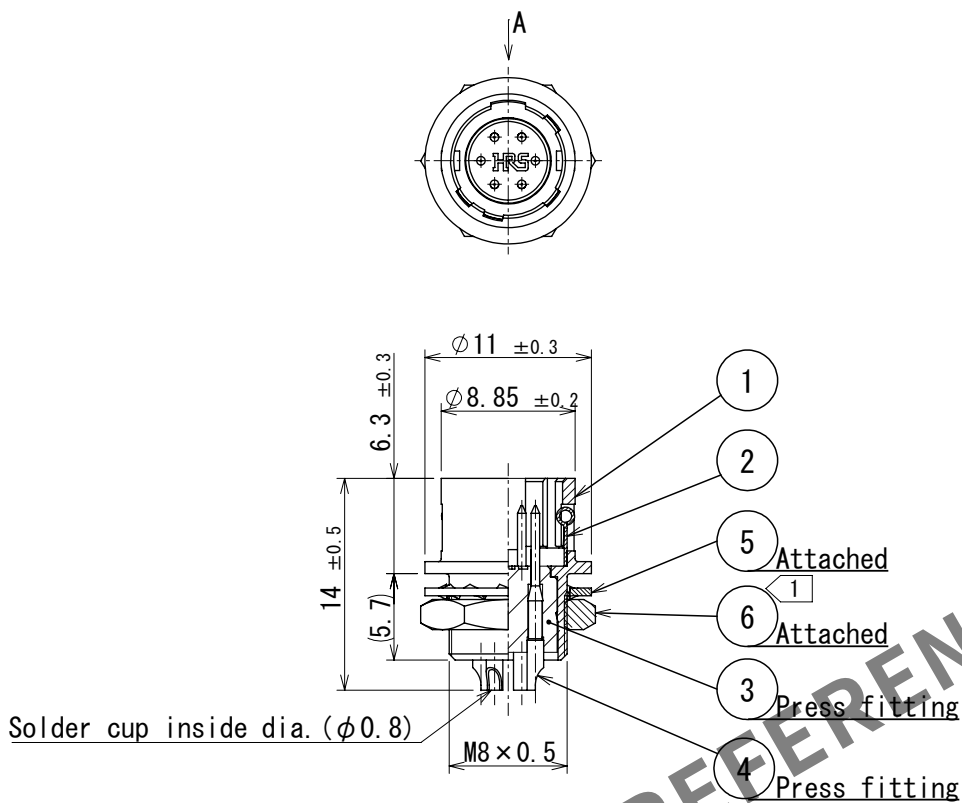

A Detail of mounting guide

Note 1 The recommended clamp torque of Ref.No. ⑥ to be 1.5 N・m.
⚠ Loctite 243, Henkel Japan or equivalent apply to prevent Ref.No. ⑥ from loosening.

⚠ CAD change

3	Polyamide	(Black) UL94V-0	6	Brass	Nickel plating
2	Stainless steel		5	Phosphor bronze	Nickel plating
1	Zinc alloy	Matte finish nickel plated	4	Brass	Silver plating 2μm min.
NO.	MATERIAL	FINISH , REMARKS	NO.	MATERIAL	FINISH , REMARKS
UNITS mm					
SCALE 2:1		COUNT 2	DESCRIPTION OF REVISIONS DIS-C-00019333		DESIGNED HY. KISHI
					CHECKED HY. KOBAYASHI
					DATE 2025. 02. 25
APPROVED : MO. SATOH 2005. 10. 20			DRAWING NO. EDC-020541-73-73		
CHECKED : E.J. KUNII 2005. 10. 20			PART NO. HR10A-7R-6P (73)		
DESIGNED : DS. MATSUNE 2005. 10. 19			CODE NO. CL0110-0308-1-73		
DRAWN : DS. MATSUNE 2005. 10. 19					